

MV30H Series

30W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters



Features

- Rated power: 30W Max
- Input voltage range 2:1
- Regulated output
- High efficiency up to 90%
- Isolation voltage 1.5KVDC
- Remote On/Off control
- Operating temperature range: -40 ~ +80°C ambient
- RoHS compliant
- Standard 2"x1" package
- Under voltage, over voltage, over current, and short circuit protections
- Meet IEC/EN/UL 62368-1 CISPR32, EN55032
- 3 year warranty



Overview


The MV30H series are 1.5KV isolated 30Watt DC/DC converters with standard DIP2"x1" footprint. Designed with high efficiency, they operate in a wide temperature range from -40°C to +80°C. Other features include wide 2:1 input voltage range, remote on/off control, output trimming, under voltage, over voltage, over current, and short circuit protections. These converters are ideally suitable for industrial control system, measurement equipment, telecom, wireless network.

Model Numbers

Model Number	Input Voltage [VDC]			V _{OUT} [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
MV30H-2403	24	18~36	40	3.3	6000	0	85	10000
MV30H-2405	24	18~36	40	5	6000	0	88	10000
MV30H-2409	24	18~36	40	9	3333	0	86	4700
MV30H-2412	24	18~36	40	12	2500	0	88	2700
MV30H-2415	24	18~36	40	15	2000	0	90	1680
MV30H-2424	24	18~36	40	24	1250	0	90	680
MV30H-2412D	24	18~36	40	±12	1250	0	90	1250
MV30H-2415D	24	18~36	40	±15	1000	0	90	680
MV30H-4803	48	36~75	80	3.3	6000	0	86	10000
MV30H-4805	48	36~75	80	5	6000	0	88	10000
MV30H-4812	48	36~75	80	12	2500	0	88	2700
MV30H-4815	48	36~75	80	15	2000	0	89	1680
MV30H-4824	48	36~75	80	24	1250	0	89	680

* Only typical models are listed. Other models may be available upon request.

* Exceeding the maximum input voltage may cause permanent damage;



Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Reflected ripple current		-	40	-	mA	
Input voltage surge 1 second max	$V_{IN, Nom} = 24\text{V}$ $V_{IN, Nom} = 48\text{V}$	-0.7 -0.7	-	50 100	Vdc	
Startup input voltage	$V_{IN, Nom} = 24\text{V}$ $V_{IN, Nom} = 48\text{V}$	-	-	18 36	VDC	
Startup time	Resistive load	-	10	-	mS	
Remote On/Off control "Ctrl" pin open or logic high [ON] "Ctrl" pin grounded or logic low [OFF]	Logic high Logic low Ctrl pin current	3.5 0 -	- - 5	12 1.2 8	VDC VDC mA	Positive Logic
Output voltage accuracy	$I_{OUT}=0\%$ to 5% $I_{OUT}=5\%$ to 100%	-	± 1 ± 1	± 5 ± 3	%	
Line regulation Full load, $V_{IN} = V_{IN, Min}$ to $V_{IN, Max}$		-	± 0.2	± 0.5	%	
Load regulation $I_{OUT}=5\%$ to 100% of $I_{OUT, rated}$		-	± 0.5	± 1.0	%	
Output ripple and noise	20MHz bandwidth	-	50	100	mVp-p	
Temperature coefficient	Full load	-	-	± 0.03	%/ $^{\circ}\text{C}$	
Dynamic load response $I_{OUT}=25\% \sim 50\% \sim 75\%$ of $I_{OUT, rated}$	Peak deviation** Peak deviation Recovery time	-	± 5 ± 3 300	± 8 ± 5 500	% V_{OUT} % V_{OUT} μS	** $V_{OUT}=3.3, 5\text{V}$
Output voltage trim	Trim range	-	-	± 10	% V_{OUT}	
Output over voltage protection		110	-	160	% V_{OUT}	
Output over current protection		110	-	190	% I_{OUT}	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitive				
Hot plug		None				

MV30H Series

30W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters




General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Isolation voltage 1 minute, leakage current 1mA max.	I/P to O/P	1500	-	-	VDC	
Isolation resistance Tested at 500VDC, input to output	I/P to O/P	1000	-	-	M ohm	
Isolation capacitance 100KHz, 0.1V	I/P to O/P	-	2000	-	pF	
Switching frequency*	Full load	-	300	-	KHz	PWM mode
Operating temperature	See "Derating Curve"	-40	-	+80	°C	
Storage temperature		-55	-	+125	°C	
Storage humidity	None condensing	5	-	95	%RH	
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C	
Cooling method		Free air convection				
Case material		Aluminum alloy				
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z				
MTBF	MIL-HDBK-217F	>1,000,000 Hours, T _A =25°C				
Design based on standards		UL/EN/IEC 62368-1				
Safety certifications		IEC/EN 62368-1				
EMC		CISPR32, EN55032 Class B with external circuit IEC/EN61000-4-2, 3, 4, 5, 6				
Size, and Weight		50.8 x 25.4 x 12 mm, 30g				

* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.

* Switching frequency is measured at full load. The converter reduces the switching frequency at low load [less than 50% load] for better efficiency.



MV30H Series

30W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters




Characteristic Curves


Derating Curve

Output vs Ambient Temperature

$V_{OUT}=3.3, 5V$

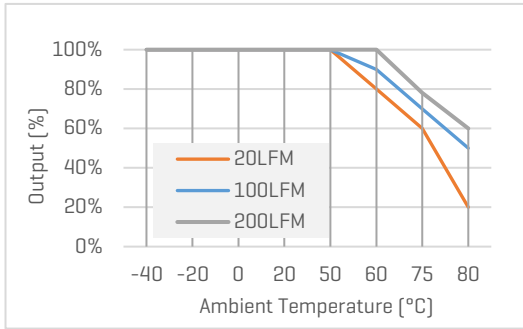


$V_{IN}=Others$

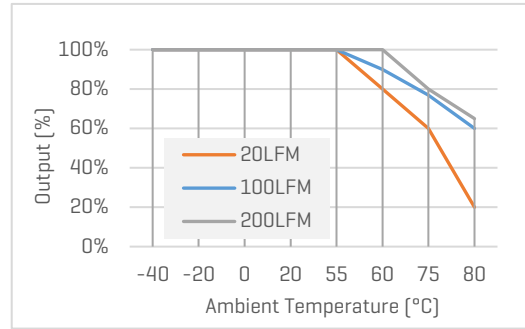

Efficiency Curve



Efficiency vs Input Voltage

MV30H-2405, with full Load

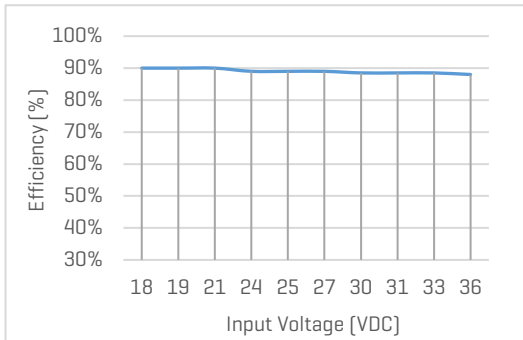

Efficiency vs Load

MV30H-2405, with nominal input voltage

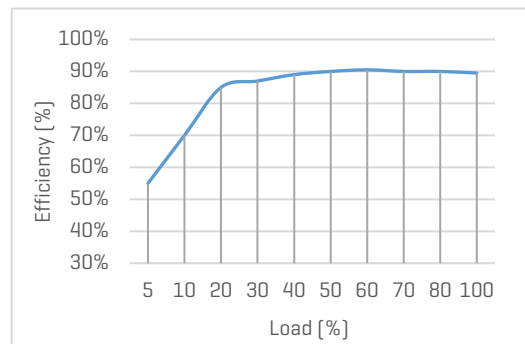


MV30H Series

30W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters



Recommended Application Circuit

Typical Application Circuit

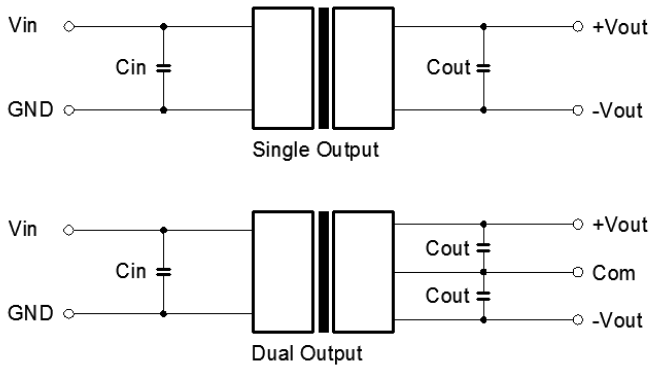

Note

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	24V	48V
C_{IN}	100uF, 50V	100uF, 100V

[Table 2] Recommended component spec

Output voltage	3.3, 5, 9V	12, 15, 24V
C_{OUT}	220uF	100uF

EMC Enhancement for EN55032 Class B

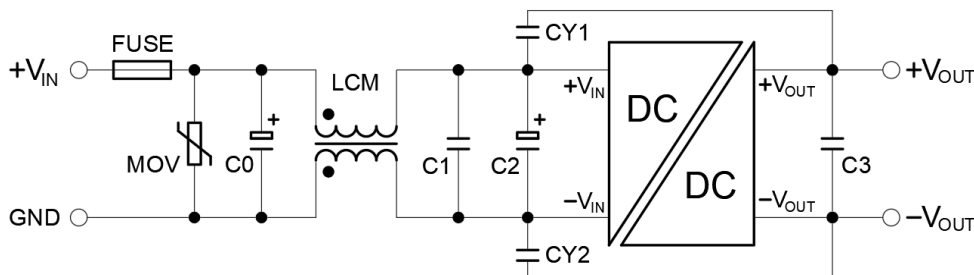


Figure 2. Circuit for EMC Enhancement

[Table 3] Recommended component spec [Single output]

Component	MOV	LCM	C0	C1	C2	CY1, CY2
$V_{IN}=24V$	S20K30	1mH	680uF, 50V	330uF, 50V	4.7uF, 50V	1nF, 2KV
$V_{IN}=48V$	S14K60	1mH	330uF, 100V	330uF, 100V	2.2uF, 100V	1nF, 2KV


* Fuse to be selected according to application needs.

* C3 refer to relative C_{OUT} values in Table 2.

Recommended Application Circuit [continued]

Circuits for Output Trim

* Components within the red block are internal components of the converter.

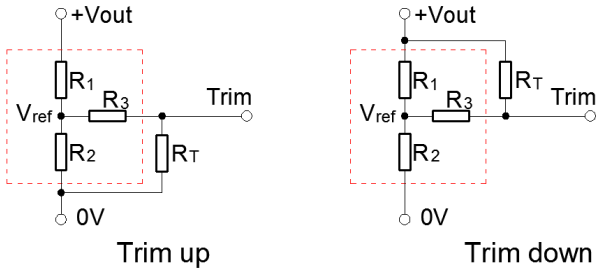

[Table 3] Internal Component Spec

V _{OUT} [V]	R1 [K Ohm]	R2 [K Ohm]	R3 [K Ohm]	V _{ref} [V]
3.3	4.80	2.87	12.4	1.24
5	2.88	2.87	10	2.5
9	7.50	2.87	15	2.5
12	11.00	2.87	15	2.5
15	14.95	2.87	15	2.5
24	24.87	2.87	17.8	2.5

* The formulas to calculate the desired resistance of Trim resistor "R_T".

$$\text{Trim up: } R_T = \frac{a R_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{OUT} - V_{ref}} R_1$$

$$\text{Trim down: } R_T = \frac{a R_1}{R_1 - a} - R_3 \quad a = \frac{V_{OUT} - V_{ref}}{V_{ref}} R_2$$



MV30H Series

30W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters



Mechanical Specifications

No Suffix, Default Package

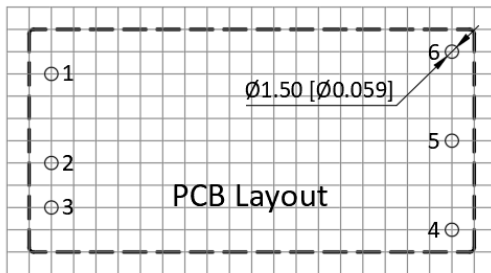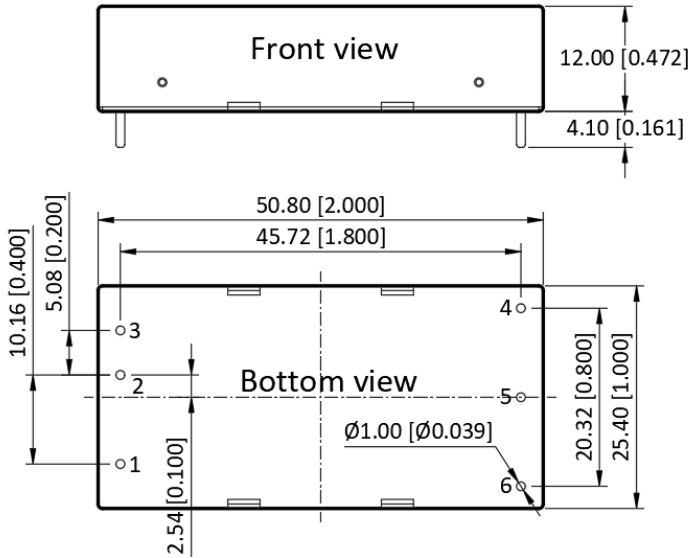

Pin Definition

Pin #	Single Out	Dual Out
1	Ctrl	Ctrl
2	GND	GND
3	V _{IN}	V _{IN}
4	+V _{OUT}	+V _{OUT}
5	OV	COM
6	Trim	-V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ±0.50 [±0.020]

* Pin thickness: ±0.10 [±0.004]

* Footprint grid 2.54 x 2.54 mm

