

MV40H Series

40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"x1" DC/DC Converters



Features

- Rated power: 40W Max
- Input voltage range 2:1
- Regulated output
- High efficiency up to 91%
- Isolation voltage 1.5KVDC
- Remote On/Off control
- Operating temperature range: -40 ~ +85°C ambient
- RoHS compliant
- Standard 2"x1" package
- Under voltage, over voltage, over current, and short circuit protections
- Meet IEC/EN/UL 62368-1 CISPR32, EN55032
- 3 year warranty



Overview


The MV40H series are 1.5KV isolated 40Watt DC/DC converters with standard DIP2"x1" footprint. Designed with high efficiency, they operate in a wide temperature range from -40°C to +85°C. Other features include wide 2:1 input voltage range, remote on/off control, output trimming, under voltage, over voltage, over current, and short circuit protections. These converters are ideally suitable for industrial control system, measurement equipment, telecom, wireless network.

Model Numbers

Model Number	Input Voltage [VDC]			V _{OUT} [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
MV40H-1203	12	9~18	25	3.3	8000	0	88	15000
MV40H-1205	12	9~18	25	5	8000	0	88	10000
MV40H-1212	12	9~18	25	12	3333	0	89	2700
MV40H-1215	12	9~18	25	15	2667	0	90	1680
MV40H-1224	12	9~18	25	24	1667	0	90	680
MV40H-2403	24	18~36	40	3.3	8000	0	88	15000
MV40H-2405	24	18~36	40	5	8000	0	88	10000
MV40H-2412	24	18~36	40	12	3333	0	90	2700
MV40H-2415	24	18~36	40	15	2667	0	91	1680
MV40H-2424	24	18~36	40	24	1667	0	91	680
MV40H-4803	48	36~75	80	3.3	8000	0	88	15000
MV40H-4805	48	36~75	80	5	8000	0	88	10000
MV40H-4812	48	36~75	80	12	3333	0	90	2700
MV40H-4815	48	36~75	80	15	2667	0	91	1680
MV40H-4824	48	36~75	80	24	1667	0	91	680

* Only typical models are listed. Other models may be available upon request.

* Input voltage exceed the Max. value may cause permanent damage.



MV40H Series

40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"X1" DC/DC Converters




Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Reflected ripple current		-	40	-	mA	
Input voltage surge 1 second max	$V_{IN, Nom} = 12\text{V}$ $V_{IN, Nom} = 24\text{V}$ $V_{IN, Nom} = 48\text{V}$	-0.7 -0.7 -0.7	-	25 50 100	VDC	
Startup input voltage	$V_{IN, Nom} = 12\text{V}$ $V_{IN, Nom} = 24\text{V}$ $V_{IN, Nom} = 48\text{V}$	-	-	9 18 36	VDC	
Startup time	Resistive load	-	10	-	mS	
Remote On/Off control "Ctrl" pin open or logic high [ON] "Ctrl" pin grounded or logic low [OFF]	Logic high Logic low Ctrl pin current	3.5 0 -	- - 5	12 1.2 10	VDC VDC mA	Positive Logic
Output voltage accuracy	$I_{OUT}=5\%$ to 100%	-	± 1.0	± 3.0	%	
Line regulation Full load, $V_{IN} = V_{IN, Min}$ to $V_{IN, Max}$		-	± 0.2	± 0.5	%	
Load regulation $I_{OUT}=5\%$ to 100% of $I_{OUT, rated}$		-	± 0.5	± 1.0	%	
Output ripple and noise	20MHz bandwidth	-	50	100	mVp-p	
Temperature coefficient	Full load	-	-	± 0.03	%/ $^{\circ}\text{C}$	
Dynamic load response $I_{OUT}=25\% \sim 50\% \sim 75\%$ of $I_{OUT, rated}$	Peak deviation** Peak deviation Recovery time	-	± 5 ± 3 300	± 8 ± 5 500	% V_{OUT} % V_{OUT} μS	** $V_{OUT}=3.3, 5\text{V}$
Output voltage trim	Trim range	-	-	± 10	% V_{OUT}	
Output over voltage protection		110	-	160	% V_{OUT}	
Output over current protection		110	-	190	% I_{OUT}	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitive				
Hot plug		None				

* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.



MV40H Series


40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"X1" DC/DC Converters



General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Isolation voltage 1 minute, leakage current 1mA max.	I/P to O/P	1500	-	-	VDC	
Isolation resistance Tested at 500VDC	I/P to O/P	1000	-	-	M ohm	
Isolation capacitance 100KHz, 0.1V	I/P to O/P	-	2000	-	pF	
Switching frequency*	Full load	-	300	-	KHz	PWM mode
Operating temperature	See "Derating Curve"	-40	-	+85	°C	
Storage temperature		-55	-	+125	°C	
Storage humidity	None condensing	5	-	95	%RH	
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C	
Cooling method		Free air convection				
Case material		Aluminum alloy				
Vibration		10-55Hz, 10G, 30Min along X, Y and Z				
MTBF	MIL-HDBK-217F	>500,000 Hours, T _A =25°C				
Design based on standards		UL/EN/IEC 62368-1				
Safety certifications		IEC/EN 62368-1				
EMC		CISPR32, EN55032 Class B with external circuit IEC/EN61000-4-2, 3, 4, 5, 6				
Size, and Weight	Default option	50.8 x 25.4 x 12.0mm, 30g				

* Switching frequency is measured at full load. The converter reduces the switching frequency at low load [less than 50% load] for better efficiency.



MV40H Series

40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"X1" DC/DC Converters




Characteristic Curves

Derating Curve

Output vs Ambient Temperature


No heatsink

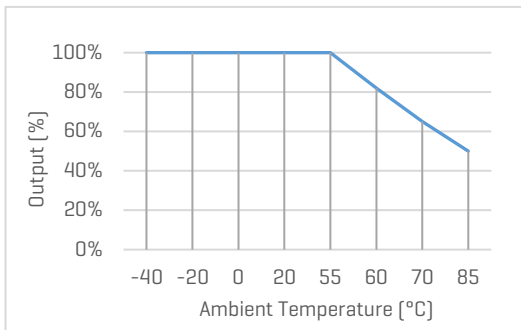

Efficiency Curve


Efficiency vs Input Voltage

MV40H-2424, with full Load

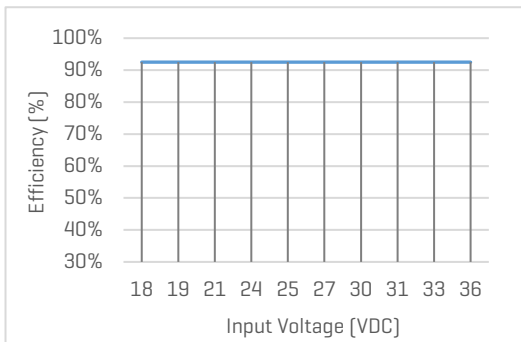


Efficiency vs Load



MV40H-4812, with full Load

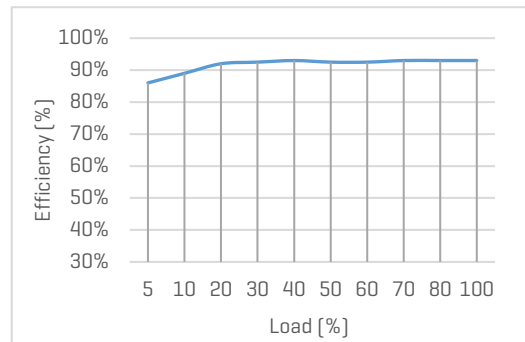

MV40H-2424, with full Load

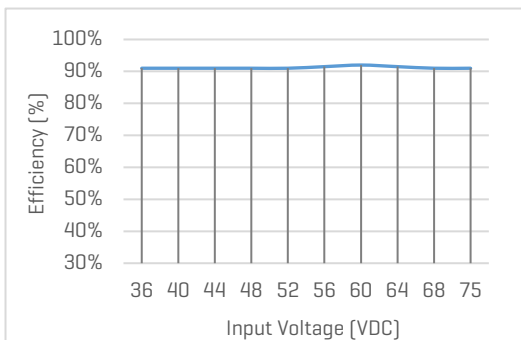

MV40H-4812, with nominal input voltage

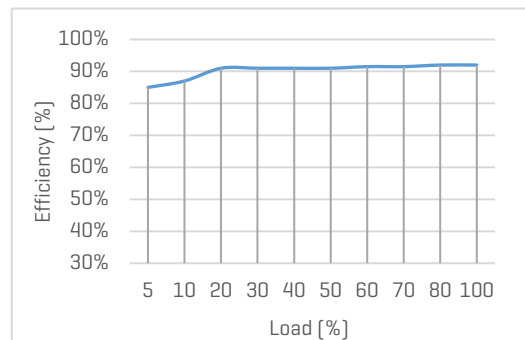

MV40H Series

40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"X1" DC/DC Converters



Recommended Application Circuit

Typical Application Circuit

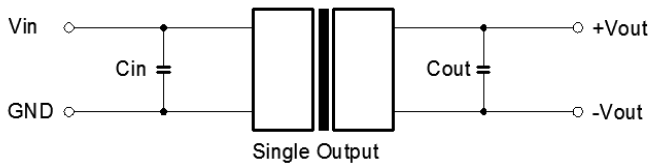


Figure 1. Typical external circuit

Note

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

[Table 1] Recommended component spec

Input voltage	12V	24V	48V
C_{IN}	100uF, 25V	100uF, 50V	100uF, 100V

[Table 2] Recommended component spec

Output voltage	3.3, 5, 9V	12, 15, 24V
C_{OUT}	220uF	100uF

EMC Enhancement for EN55032 Class B

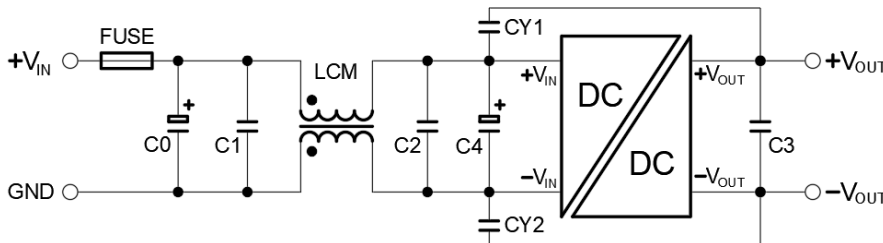



Figure 2. Circuit for EMC Enhancement

[Table 3] Recommended component spec [Single output]

Component	MOV	LCM	C0	C1, C2	C4	CY1, CY2
$V_{IN}=24V$	20D470K	2.2mH	680uF, 50V	4.7uF, 50V	330uF, 50V	2.2nF, 2KV
$V_{IN}=48V$	14D101K	2.2mH	680uF, 100V	4.7uF, 100V	330uF, 100V	2.2nF, 2KV

* Fuse to be selected according to application needs.


* C3 refer to relative C_{OUT} values in Table 2.



Recommended Application Circuit [continued]

Circuits for Output Trim

* Components within the red block are internal components of the converter.

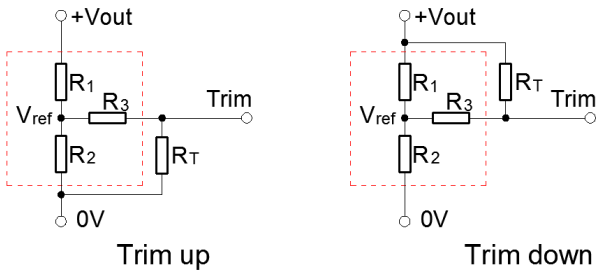


[Table 3] Internal Component Spec

V _{OUT} [V]	R1 [K Ohm]	R2 [K Ohm]	R3 [K Ohm]	V _{ref} [V]
3.3	10	6.06	13.62	1.25
5	2.4	2.34	13.62	2.5
12	8.2	2.15	17.35	2.5
15	12	2.39	21.02	2.5
24	10	1.16	10.71	2.5

* The formulas to calculate the desired resistance of Trim resistor "R_T".

$$\text{Trim up: } R_T = \frac{a R_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{OUT} - V_{ref}} R_1$$

$$\text{Trim down: } R_T = \frac{a R_1}{R_1 - a} - R_3 \quad a = \frac{V_{OUT} - V_{ref}}{V_{ref}} R_2$$





MV40H Series

40W, Wide 2:1 Input, 1.5KV Isolation, DIP2"X1" DC/DC Converters



Mechanical Specifications

No Suffix, Default Package

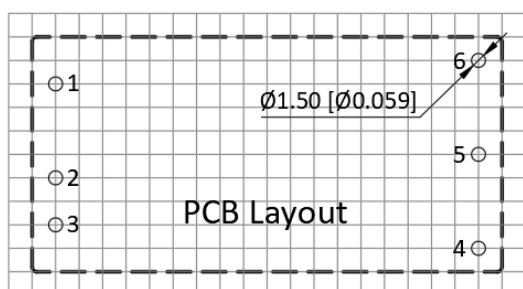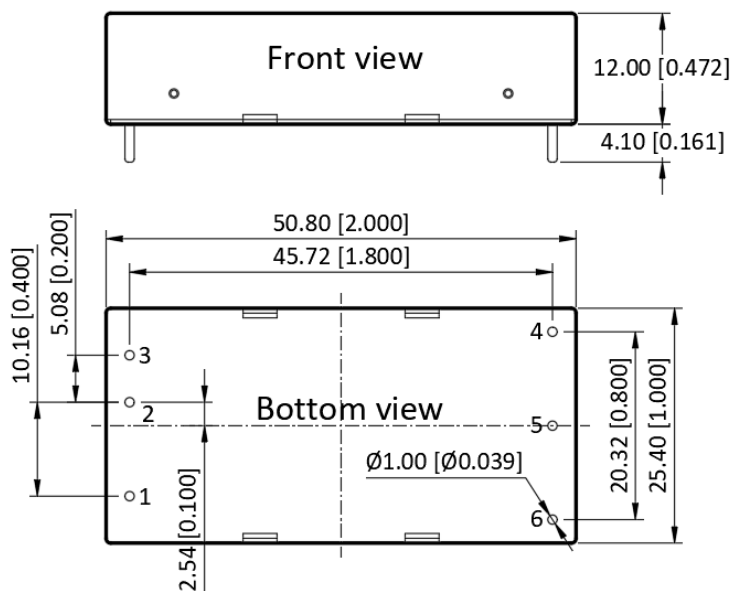

Pin Definition

Pin #	Single Out
1	Ctrl
2	GND
3	V _{IN}
4	+V _{OUT}
5	0V
6	Trim

* Unless otherwise specified unit: mm [inch]

* General tolerance: ±0.50 [±0.020]

* Pin thickness: ±0.10 [±0.004]

* Footprint grid 2.54 x 2.54 mm

